


GT3W Timer Instructions

Typical timer setting instructions for use with Drip Disposal systems.

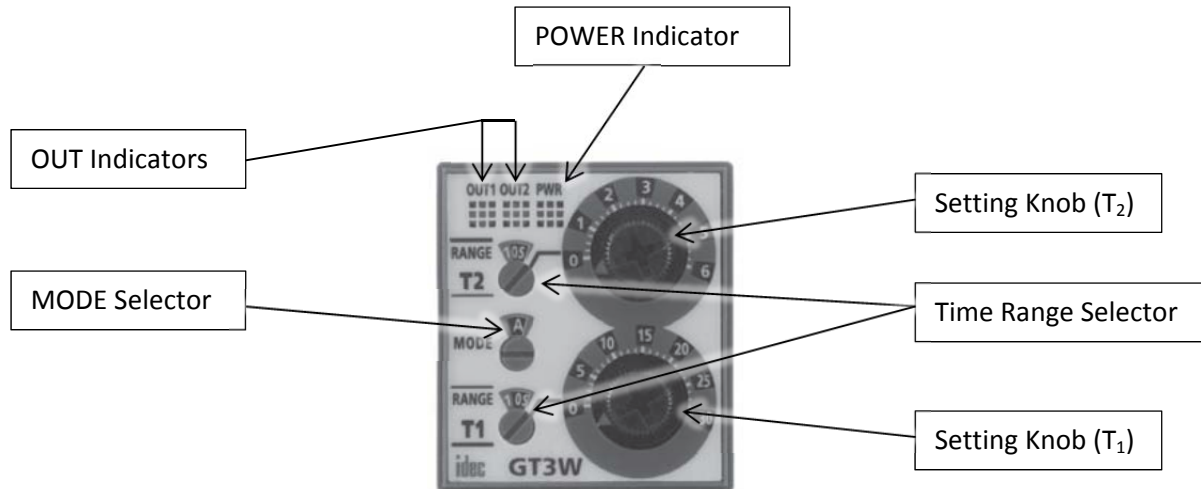

*** POWER TO TIMER SHOULD BE OFF BEFORE SETTING ***

*** DO NOT TURN DIALS OR KNOBS BEYOND THEIR LIMITS ***

1. Use a small flat head screw driver and turn the MODE Selector Dial to 'D'.

Setting The PUMP ON Cycle

** This will be your Pump RUN or ON Time Setting

Use A small screw driver and turn the "T2" Time Range Selector (Top Left) to "1M". This Indicates MINUTES. Then Turn the 'T2' Setting Knob to your required RUN or ON Minutes.

Setting The PUMP OFF Cycle

** This will be your Pump OFF Time Setting

Use A small screw driver and turn the "T1" Time Range Selector (Bottom Left) to "1H". This Indicates HOURS (if you need minutes the turn to "1M" for Minutes). Then Turn the 'T1' Setting Knob to your required OFF Hours.

- NOTE: To Override the timer turn the "T1" Setting Knob (Btm. Right) to "0"